

AURO SELF PRIMING NON-CLOG PUMP

ASP

applications

For Sewage disposal and Effluent treatment plants.


On board ships, as bilge, for deck wash and engine cooling.

For loading, unloading and transferring Oils, Gasoils, Mineral oils, Solvents, Grease, Petrol, Seawater, Thermal power plants etc.

For removing water from Basements, Trenches, Construction sites, Swimming pools, Swamps etc.

For lift irrigation and horticultural water spraying.

a
multipurpose
pump
for
clean
and
polluted liquids

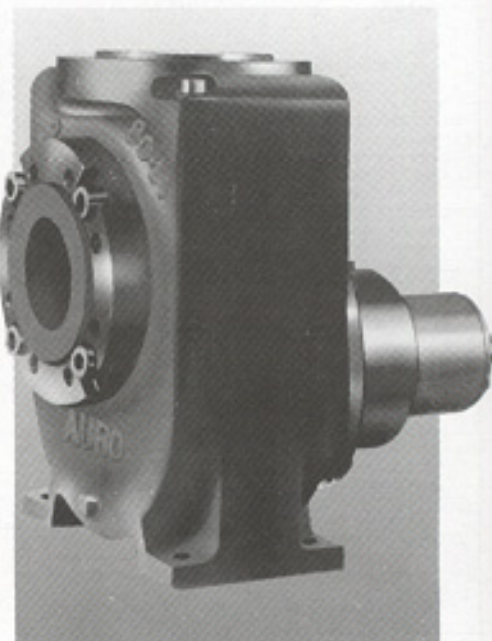

range

Capacity	- upto 250 m ³ /hr
Head	- upto 50 mtrs.
Suction Head	- upto 8 mtrs.
Solids	- 40 mm dia
Viscosity	- upto 100 mm ² /sec
MOC	- C.I., Bronze, CF8M

special features


Perfect sealing is assured by high quality mechanical seal, which can even run dry, due to in-pump oil reservoir.

Extra large impeller with wide flow passage avoids clogging for easy handling of polluted liquids.

Needs no foot valve. The pump primes itself.

Variety of drive options of electric motor - coupled or monoblock, belt drive version or petrol/diesel engine.

SATISFYING
DIVERSE &
EXACTING NEEDS
OF THE CUSTOMERS
SINCE 1984

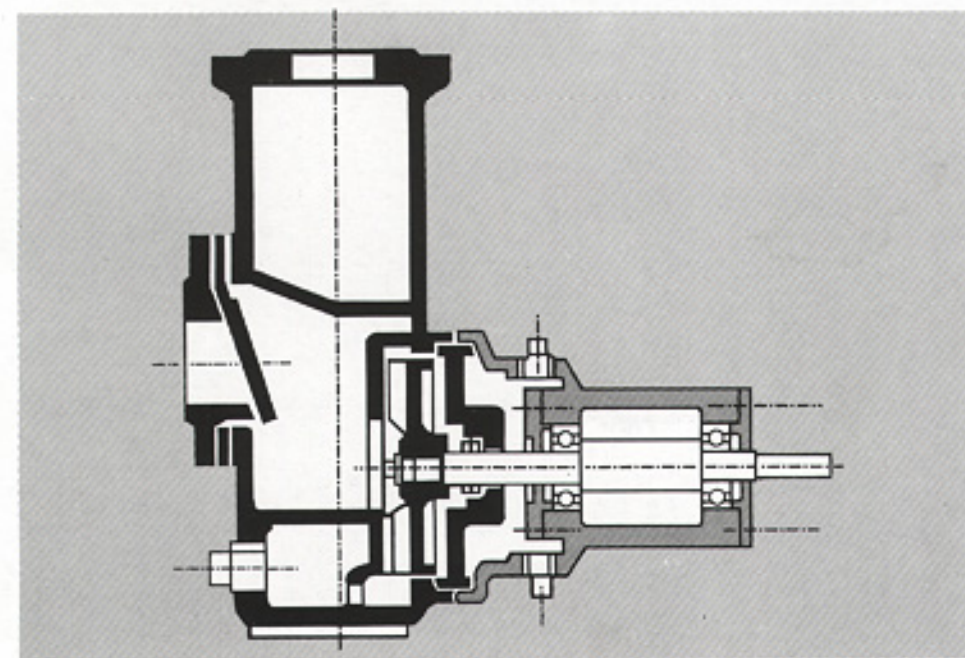

design

Close grained cast iron casing & impeller with wider space, to avoid clogging.

Back pullout design ensures easy inspection and maintenance.

Compact, light weight and rugged construction.

Perfect self priming with suction head upto 8 mtrs.

Can handle solids upto 40 mm dia.



the AURO range

ACC CHEMICAL PROCESS PUMPS

ACC THERMIC FLUID PUMPS

ACCV VERTICAL SUBMERGED PUMPS

MULTI STAGE BOILER FEED PUMPS

SUBMERSIBLE PUMPSET FOR 4", 6" & 8" BORE

MONOBLOCK PUMPSET UPTO 10 H.P.

SUBMERSIBLE HORIZONTAL

MONOBLOCK PUMPSET FOR OPEN

WELL UPTO 7.5 H.P.

ELECTRIC MOTORS

PUMP TYPE	RECOMMENDED H.P.	R.P.M.	MAXIMUM SOLID SIZE (mm)	PIPE SIZE (Inches)	M ³ / Hr.	HEAD IN METERS												
ASP 30 x 110	1.0	2900	7.5	1.25	15	14	11.5	9										
ASP 40 x 110	1.5	2900	12.0	1.50	16	15	14	13	11.5	10								
ASP 50 x 120	2.0	2900	10.0	2.00	20	19	18	16.5	15.5	14	10							
ASP 50 x 120 w	3.0	2900	13.0	2.00		20	19	18	17	16	14	10						
ASP 65 x 120	5.0	2900	20.0	2.50				20.5	20	19.5	18	17	16	13.5	5.5			
ASP 80 x 140	5.0/7.5	2900	24.0	3.00					22.5	22	21	20.5	20	18.5	15	10		
ASP 65 x 150	7.5	2900	11.0	2.50				29	28	27	25	23	21	16				
ASP 30 x 160	3.0	2900	6.0	1.25	32	28.5	24.5	19	10									
ASP 65 x 160	7.5	2900	12.0	2.50				35	34.5	34	32	31	29	22.5				
ASP 40 x 180	5.0	2900	6.5	1.50	39.5	37	34	31	27.5	22								
ASP 50 x 200	7.5	2900	4.0	2.00		48	47.5	46	45	43	33							
ASP 65 x 220	15.0	2900	10.0	2.50				57	56	55	53	50	47	42	31.5			

Note : Product improvement is a continuous process at AURO. The data given in this publication is therefore subject to revision.

PUMP TYPE	RECOMMENDED H.P.	R.P.M.	MAXIMUM SOLID SIZE (mm)	PIPE SIZE (Inches)	M ³ / Hr.	HEAD IN METERS												
ASP 80 x 210	5.0	1450	21	3	13	12.5	12	11.5	11	9								
ASP 100 x 250	12.5	1450	26	4		23.5	23	22.5	22	21	19	15						
ASP 150 x 290	20.0	1450	40	6				21	20	19	18	16	14	8.5				
	25.0	1450	50	6				26	25.5	25	24	22.5	21	18	13			

For trade enquiries please contact the Marketing dept.

AURO PUMPS PVT. LTD.

Marketing Office

226, Race Course Towers, Race Course,

Vadodara - 390 015, INDIA.

Ph : (0265) 335897, TeleFax : 351235

E-mail : auroump@pi.zaverchand.co.in

Regd. Office & Works

104/5 & 6 G.I.D.C. Palej - 392 220,

Dist. Bharuch, Gujarat, INDIA.

Ph : (02642) 77025 TeleFax : 77019

Branch Office

94/A, Mittal Court, A Wing,

Nariman Point, Mumbai - 400 021

Ph : (022) 2831661, 2825431

dealer

